

## SKYTILE® RANGE

### JC71276


600 X 600 LED PANEL

Light source: Integral LED  
Total circuit Wattage: 28W  
Luminous flux: 3000 lumens  
Efficacy: 107 LpcW  
Colour temp: 4700K  
Ra: 80

#### Driver

**220-240V 50/60Hz / Class II** 


**Fig. 1 Mains Input Cable**




#### Luminaire

**730mA/30-50V DC / Class III** 

**Fig. 2: Plug & Play Connectors**



**CE** **RoHS** Compliant   **IP44**

BS EN ISO9001 - 2008  
Registered Firm Certificate No. GB 1552  
Drg No. JC71276-IS Issue: R - 24.11.15 - RCS

## Installation Sheet

Please read these instructions before  
installation and retain for future reference

### Important Information

Please read these instructions before installation and retain for future reference. It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the current IEE wiring regulations BS7671: 2008. Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations. This product is for indoor use only, and should not be covered by any insulated material. **The light source of this luminaire is not replaceable : when the light source reaches its end of life, the whole of the luminaire shall be replaced.**


### Installation Note

It may be necessary to uprate your MCBs to allow for increased inrush current.

### Installation Procedure

Read instructions and check you have all the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.

1. Remove the ceiling tile from the location where you wish to install the LED Panel.
2. Wire the LED Driver to the mains supply. Refer to Fig.1 for details.
3. Move LED Panel into the ceiling aperture and when positioned halfway connect the Driver to the LED Panel (Fig. 2).
4. View on inside of ceiling void showing LED Panel in position with the Driver positioned on top of it.
5. Reconnect mains power supply.

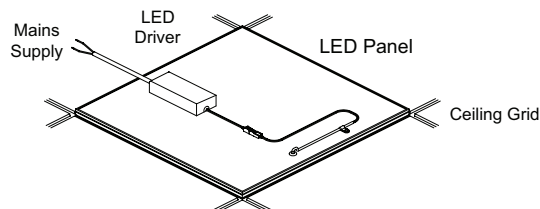

Note: DO NOT carry out insulation tests with the driver connected to the circuit. The external flexible cable cord of this luminaire cannot be replaced: if the cord is damaged the luminaire should be decommissioned and destroyed.

### Important Warranty Information


Skytile is supported by a 2 year on site warranty, plus our 5 year extended commercial warranty, to provide a total of 7 years of assured quality and performance.  
(2 year on site warranty applies from date of purchase for UK installations only)

Please register at the address below; The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis:

Product Code Batch Code.

**jcc.co.uk**

## Profile & Dimensions

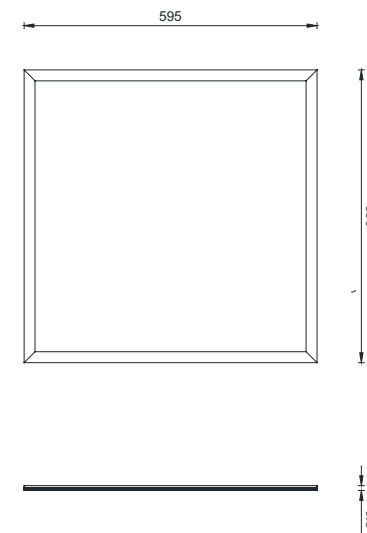


All dimensions in millimetres

#### Suspension Mounting

JCC can also supply a Wire Suspension Kit for applications where a ceiling grid is not available

Ordering Code: JC71311

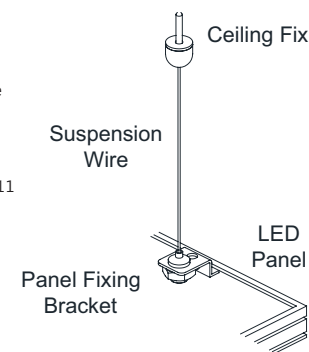

Surface Mounting  
JCC can also supply a Surface Mounting Tray.

Ordering Code: JC71262.

Please ensure there is adequate clearance around the fitting to allow access to the panel.

