

JC71703

Skypack LED Batten 1200mm '4ft Twin' 40W 5140lm 4000K IP20

Features & Benefits

- Retrofit point for point conduit entry
- Hinged LED tray for simple installation
- Smooth, even light distribution, no visible hotspots
- Press-fit termination

General Information

Product Group	LED - Surface
Product Range	Skypack
Trade Name	Skypack
Light Source	LED
Light Source Features	Neutral White
Lighting Product Type	Linear Lighting
Product Shape	Rectangular
Mounting	Surface Mounted

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112

T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Product Weight	1.384kg
Color Finish	White
Recommended Product Location	Domestic, commercial and industrial applications
Method Of Fix	Surface with conduit entry
IP Rating	IP20
Environment	Indoor
Suitable For Zones	Outside zone 1 & 2
Luminaire Accessories	None
Guarantee	5 year warranty
Driver Manufacturer	3A
LED Manufacturer/Type	2835/HongLi

Electrical

Voltage Rating	220-240
Secondary Running Current	0.8 Amps
Primary Running Current	0.24 Amps
Operating Frequency (Hz)	50/60Hz
CC or CV	Constant current
Luminaire Circuit Wattage	40W
Sec - Voltage (V)	45-48V DC
Class	Class I, requires earth
Total Harmonic Distortion (THD)%	TBC
EMC Compliant (EN55015)	TBC
Power Factor Correction	0.95
Input Electrical Connections	Live, Earth, Neutral
Dimmable	No

Thermals

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112
T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Max Luminaire Ambient Temp.	26°C
Max Driver/Ballast Ambient Temp.	75°C
Thermal Cut Out	No
Insulation Coverage	Do not cover
Minimum Free Air Space	100mm

Performance Data

Energy Rating	A+
Actual Lumen Output	5100
Lumens Per Circuit Watt	129 lm/W
LED Life (Hours)	50,000 to L70
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	4000K
Light Distribution Detail	120-degree
LOR (Light Output Ratio) %	100%
Photometry Available	Yes

Construction

Primary Material	Steel
Diffuser	Opal polycarbonate
Heat Sink	Pressed steel
Driver Housing	Pressed steel

Packaging

Luminaire Carton Dimensions	83mm x 73mm x 1230mm
Quantity Per Outer Carton	4
Bar Code EAN Number	5052544046506
Packaged Weight	TBC

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112

T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Standards & Approvals


Listings	CE
Manufactured In Accordance To	BS EN 60598-2-1
CE Marked	Yes
Batch Coded	Yes
Certificate Of Conformity	Yes, available on request
Accredited Members	LIA, ISO9001:2015, ISO14001:2015

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112
T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

STANDARD

MW ON/OFF

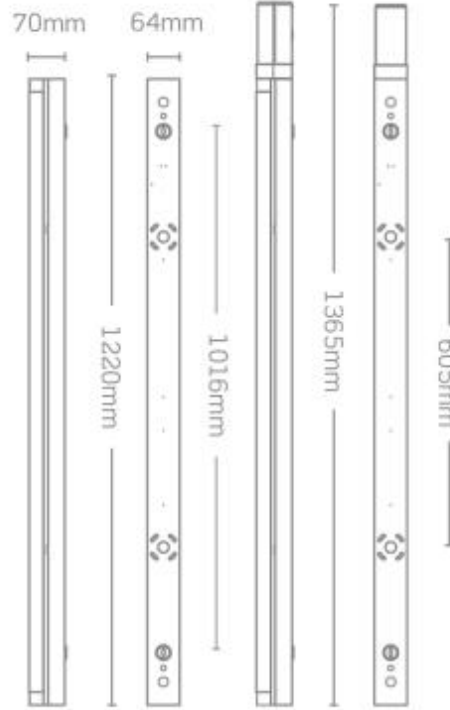

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112
T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk