

JC71710

Skypack Plus LED Batten 1800mm '6ft Twin' 90W 10800lm 4000K IP20

Features & Benefits

- Up to 41% greater light output than traditional 36W T8
- Retrofit point for point conduit entry
- Hinged LED tray for simple installation
- Smooth, even light distribution, no visible hotspots
- Press-fit termination
- DALI and 1-10V dimmable options available

General Information

Product Group	LED - Surface
Product Range	Skypack Plus
Trade Name	Skypack
Light Source	LED
Light Source Features	Neutral White
Lighting Product Type	Linear Lighting
Product Shape	Rectangular

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112

T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Mounting	Surface Mounted
Product Weight	1.834kg
Color Finish	White
Recommended Product Location	Domestic, commercial and industrial applications
Method Of Fix	Surface with conduit entry
IP Rating	IP20
Environment	Indoor
Suitable For Zones	Outside zone 1 & 2
Luminaire Accessories	None
Guarantee	5 year warranty
Driver Manufacturer	3A
LED Manufacturer/Type	2835/HongLi

Electrical

Voltage Rating	220-240
Secondary Running Current	2 x 0.9 Amps
Primary Running Current	2 x 0.23 Amps
Operating Frequency (Hz)	50/60Hz
CC or CV	Constant current
Luminaire Circuit Wattage	90W
Sec - Voltage (V)	2x 45-48V DC
Class	Class I, requires earth
Total Harmonic Distortion (THD)%	TBC
EMC Compliant (EN55015)	TBC
Power Factor Correction	0.95
Input Electrical Connections	Live, Earth, Neutral
Dimmable	No

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112
T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Thermals

Max Luminaire Ambient Temp.	26°C
Max Driver/Ballast Ambient Temp.	75°C
Thermal Cut Out	No
Insulation Coverage	Do not cover
Minimum Free Air Space	100mm

Performance Data

Energy Rating	A+
Actual Lumen Output	10800
Lumens Per Circuit Watt	120 lm/W
LED Life (Hours)	50,000 to L70
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	4000K
Light Distribution Detail	120-degree
LOR (Light Output Ratio) %	100%
Photometry Available	Yes

Construction

Primary Material	Steel
Diffuser	Opal polycarbonate
Heat Sink	Pressed steel
Driver Housing	Pressed steel

Packaging

Luminaire Carton Dimensions	83mm x 73mm x 1830 mm
Quantity Per Outer Carton	4

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112
T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Bar Code EAN Number	5052544046575
----------------------------	---------------

Packaged Weight	TBC
------------------------	-----

Standards & Approvals

Listings	CE
-----------------	----

Manufactured In Accordance To	BS EN 60598-2-1
--------------------------------------	-----------------

CE Marked	Yes
------------------	-----

Batch Coded	Yes
--------------------	-----

Certificate Of Conformity	Yes, available on request
----------------------------------	---------------------------

Accredited Members	LIA, ISO9001:2015, ISO14001:2015
---------------------------	----------------------------------



JCC Lighting

Innovation Centre, Beeding Close, Southern Cross

Trading Estate, Bognor Regis, West Sussex, PO22 9TS

Company Registration Number: 03044848 | VAT Number: 918544112

T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

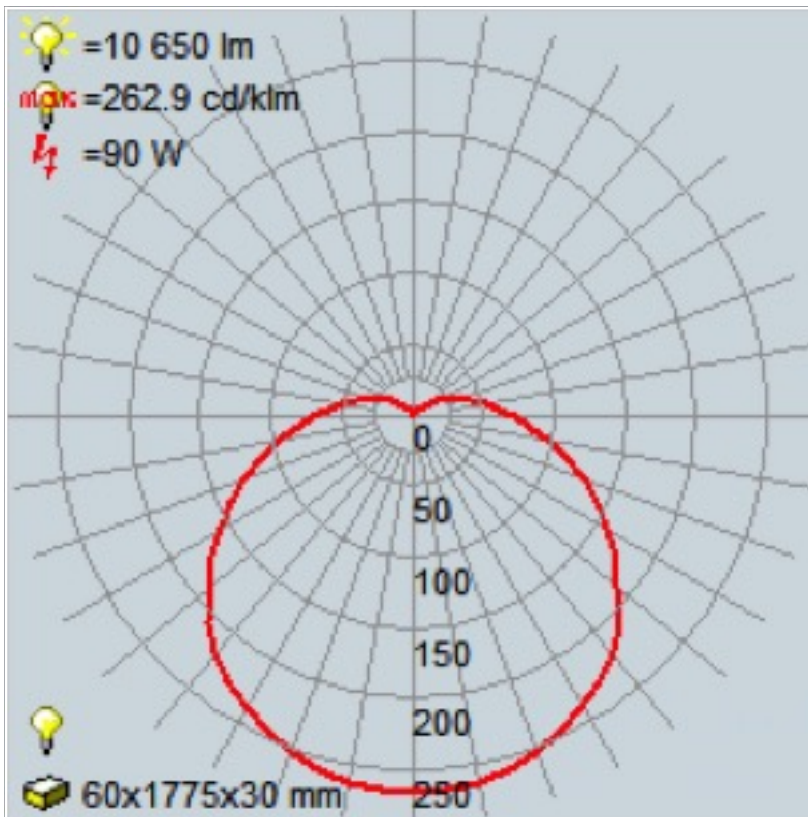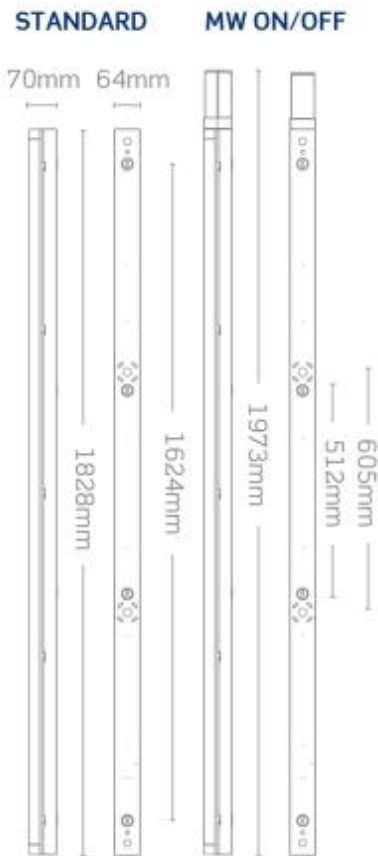

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
 Trading Estate, Bognor Regis, West Sussex, PO22 9TS
 Company Registration Number: 03044848 | VAT Number: 918544112
 T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk