

JC39409

NiteLED

NiteLED Wall Curve IP54 5W 4000K 350lm

Features & Benefits

- Super low energy 5W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Zero maintenance
- no need to relamp



WARRANTY



CRI:RA



RATING



CLASS I

General Information

Mounting

Trade Name

Environment

Product Group

Color Finish

Product Range

Product Weight(kg)

Light Source

Light Source Features

Recommended Product Location

Method Of Fix

IP Rating

Warranty

Driver Manufacturer

LED Manufacturer/Type

Surface Mounted

NiteLED

Outdoor

LED - Surface

Anthracite

NiteLED

0.6

LED

Neutral White

Outside/Wall mounted

Screws and Rawl plugs

IP54

2 year standard warranty (See Website for terms and conditions)

Self made

epistar

Electrical

| | |
|--------------------------------------|----------------------|
| Voltage Rating | 220-240 |
| Primary Running Current(Amp) | 0.02 |
| Operating Frequency Hz | 50/60Hz |
| Constant Current or Constant Voltage | CC |
| Luminaire Circuit Wattage | 3.6 |
| Class | I |
| EMC Compliant (EN55015) | Yes |
| Power Factor Correction | 0.9 |
| Input Electrical Connections | L.E.N terminal Block |
| Dimmable | No |

Thermals

| | |
|--------------------------------|----------|
| Thermal Cut Out | yes |
| Operating Temperature Range °C | 0 to +80 |

Performance Data

| | |
|------------------|-------|
| LED Life (Hours) | 40000 |
|------------------|-------|

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

| | |
|------------------------------|---|
| Energy Rating | This product contains a light source of energy efficiency class G |
| Actual Lumen Output | 350 |
| Lumens Per Circuit Watt | 70 |
| Color Rendering Index | 80-89 |
| CRI: Ra | 80 |
| Correlated Color Temperature | 4000K |
| LOR (Light Output Ratio) % | 100 |
| Photometry Available | Not available |

Construction

| | |
|------------------|---------------|
| Primary Material | Aluminium |
| Heat Sink | Aluminium |
| Driver Housing | Polycarbonate |

Packaging

| | |
|--------------------------------|---------------|
| Product Packaged Weight(kg) | 0.8 |
| Quantity Per Outer Carton | 12 |
| Product Bar Code EAN-13 Number | 5052544034817 |

Standards & Approvals

Manufactured In Accordance To
CE Marked
UKCA Marked
Date code/Purchase order No.
Certificate Of Conformity
Accredited Members

BS EN 60598-2-1



Yes

Yes

Yes

Available on request

LIA, ISO9001-2015, ISO14001-2015

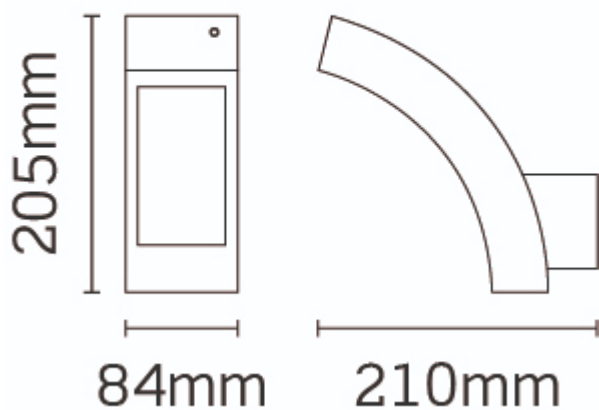

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 102 [01/02/2023]