

JC71931/50MWEM

Toughbay Linear Emergency

Toughbay Linear 100W 50° Beam Microwave Dimming Emergency

Features & Benefits

- Ultra efficient up to 140 lumens per circuit Watt
- IP65 protection against dust and moisture
- Multiple lenses available
- 1-10V dimmable as standard
- 30°x 60°, 50° and 80° lens option
- suitable for racking applications
- Step dimming available with remote control



Sensor & Remote pack not shown- see profile drawing for dimensions



CLASS I



DIMMABLE EMERGENCY



BEAM



WARRANTY



SENSING



RATING



CRI:RA

General Information

Mounting

Environment

Suitable For Zones

Product Group

Product Range

Trade Name

Color Finish

Product Shape

Overall Dimensions

Light Source

Light Source Features

Luminaire Accessories

Recommended Product Location

Method Of Fix

Distance From Lighted Object

IP Rating

Origin of manufacturer

Warranty

Surface Mounted

Indoor

Zone 1

LED - Surface

Toughbay™ Linear

Toughbay

Black

Rectangular

577mm x 125mm x 162mm

LED

Crisp White

Suspended chains + hook

Warehouse applications

Suspension eye

0.3m

IP65

Made in China

2 years standard warranty extends to 7 years when

Dimming Protocol Compatibility

Driver Manufacturer

LED Manufacturer/Type

Lighting Product Type 1

Lighting Product Type 2

Electrical

Voltage Rating

Operating Frequency Hz

Luminaire Circuit Wattage

Class

Total Harmonic Distortion (THD)%

EMC Compliant (EN55015)

Power Factor Correction

Input Electrical Connections

Dimmable

registered within the first year of purchase (2 year on batteries)(See Website for terms and conditions)

1-10V

Philips Xitanium

Philips Lumileds 3030

Linear Lighting

Emergency Lighting

220-240

50/60Hz

100W

II

<10%

Yes

0.95 @ 230V~

Switched live(brown), un/switched live(black)neutral(blue) earth(yellow/green)

Yes

Emergency Data

Inverter PFC

0.88

Battery Data

Battery Specification

Battery Type

Nominal Battery Current

Charge Current

Recharge Time

7.2V 4Ah NiCd 6 Cells

NiCd

1.1 Amp

140mA NOM

24 hours

Thermals

Max Luminaire Ambient Temp.

45°C

Performance Data

LED Life (Hours)

50000

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Energy Rating

Actual Lumen Output

Lumens Per Circuit Watt

Standard Deviation Colour Matching - SDCM

Color Rendering Index

This product contains a light source of energy efficiency class D

14000

140 LpcW

<6

50-79

CRI: Ra	70
Correlated Color Temperature	5700K
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Controls and Sensors

Detection Motion Speed	0.5~3m/s
Installation Height	3-15M
Overload Protection	yes, Auto reset
Occupancy Sensor Mode of Operation	Vacancy (Default) or Auto On
Detection Area	8M Max
Detection Angle	150° (wall installation) 360° (ceiling installation)
Microwave Frequency	5.8GHz+75MHz, ISM wave band
Transmitting Power	<0.5mW
Control	Microwave

Construction



Primary Material	Aluminum
Lens	Polycarbonate
Heat Sink	Aluminium
Driver Housing	Aluminium

Packaging

Product Bar Code EAN-13 Number	5052544099700
--------------------------------	---------------

Standards & Approvals

Manufactured In Accordance To	BS 60598-1-2015, 2-22
CE Marked	Yes
UKCA Marked	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

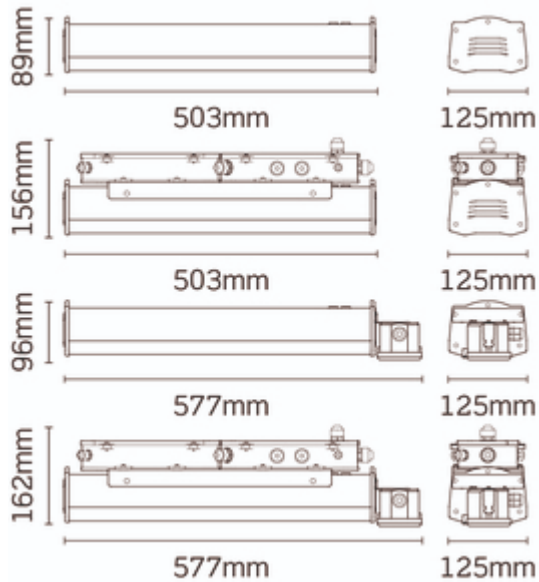

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
 Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
 Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 85 [07/12/2022]