

JC040045

Toughbay non-dim

Toughbay 200W 120° 5700K IP65 Non-Dimmable

Features & Benefits

- 120° beam angle
- Non-dimmable
- Comes pre-wired with 2m flex
- Emergency options available
- M/W on/off options available
- IP65 & IK10 rated for harsh environments
- -30° to +45° operating temperature



RATING



RATING



BEAM



WARRANTY



CLASS I



CRI:RA

General Information

Mounting

Suspended

Trade Name

Toughbay™

Environment

Demanding

Suitable For Zones

Zone 1

Product Group

Toughbay™

Color Finish

Black

Product Shape

Round

Product Range

Highbay Lowbay

IK Rating

IK10

Overall Dimensions

239Ø x 171mm

Product Weight(kg)

3.05

Light Source

LED

Light Source Features

Crisp White

Recommended Product Location

Industrial applications, warehouse, retail and mezzanine

Method Of Fix

Suspension eye

IP Rating

IP65

Origin of manufacturer

Made in China

Warranty

2 years standard warranty extends to 5 years when

	registered within the first year of purchase (See Website for terms and conditions)
Mounting Height	7m for 150-200 lux: Please note this is to be used as a rough guide and does not replace the need for a lighting design
Driver Manufacturer	Lifud
LED Manufacturer/Type	Refond 3030
Lighting Product Type 1	Bay Light
Lighting Product Type 2	Ceiling Mount

Electrical

Voltage Rating	200-240
Primary Running Current(Amp)	1.1
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	900
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	200
Class	I
Total Harmonic Distortion (THD)%	15
EMC Compliant (EN55015)	yes
Power Factor Correction	0.95
Input Electrical Connections	live(brown) neutral(blue) earth(yellow/green)
Dimmable	No

Thermals

Thermal Cut Out	yes, auto recovery
Operating Temperature Range °C	-40 to +60

Performance Data

LED Life (Hours)	54000
<p>Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.</p>	
Energy Rating	This product contains a light source of energy efficiency class E
Actual Lumen Output	24000
Lumens Per Circuit Watt	120 LpcW
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	5700K
Beam Angle °	120
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction

Primary Material	Aluminium
------------------	-----------



Lens	Polycarbonate
Heat Sink	Aluminium
Driver Housing	Aluminium

Packaging

Quantity Per Outer Carton	4
Outer carton(L)- cm	61
Outer carton(W)- cm	61
Outer carton(H)- cm	24.5
Outer carton Net weight- kg	12.2
Outer carton Gross weight- kg	15.5
Product Bar Code EAN-13 Number	5052544093470
Outer carton Bar Code ITF-14 Number	15052544093477

Standards & Approvals

Manufactured In Accordance To	BS 60598-2-1-2015
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

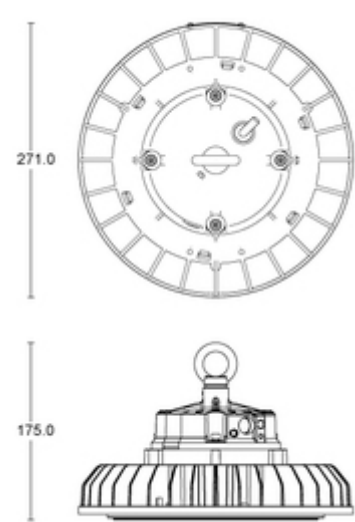

Non-replaceable control gear



Non-replaceable light source

