

# JC45220/613

## Toughflood High Output

Toughflood high output IP66 100W 4000K 14200lm 60°x130° asymmetric c/w surge pro

### Features & Benefits

- Up to 142 Lumens per circuit Watt
- 5 different beam angle options available
- LED modules can be adjusted individually
- IP66 weather resistance
- Features 10KV Surge protector as standard
- Produced to order
- contact JCC customer services on 01243 838999



CRI:RA



RATING



BEAM



CLASS I



WARRANTY

### General Information

Mounting

Trade Name

Environment

Product Group

Color Finish

Product Shape

Product Range

Overall Dimensions

Light Source

Light Source Features

Luminaire Accessories

Recommended Product Location

Method Of Fix

Max Angle Of Tilt & Rotation

IP Rating

Origin of manufacturer

Warranty

Wall

Toughflood

Outdoor

Floodlight

Black

Rectangular

Toughflood

275mm x 258mm x 110mm

LED

Neutral White

No

Exterior

Bolt fixed

180°

IP66

China

2 years standard warranty extends to 5 years when registered within the first year of purchase (See Website for terms and conditions)

Driver Manufacturer	Philips
LED Manufacturer/Type	Philips Lumileds
Lighting Product Type 1	Wall Light

Electrical

Voltage Rating	220-240
Operating Frequency Hz	50/60Hz
Luminaire Circuit Wattage	100W
Class	Class I
Total Harmonic Distortion (THD)%	< or equal to 10
EMC Compliant (EN55015)	Yes
Power Factor Correction	> or equal to 0.95
Dimmable	No

Thermals

Max Luminaire Ambient Temp.	50°C
Max Driver/Ballast Ambient Temp.	50°C
Thermal Cut Out	85°C

Performance Data

LED Life (Hours)	54000
------------------	-------

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Energy Rating	This product contains a light source of energy efficiency class D
Actual Lumen Output	14200
Lumens Per Circuit Watt	142
Color Rendering Index	50-79
CRI: Ra	70
Correlated Color Temperature	4000K
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction

Primary Material	Steel
LED Brand	Philips Lumileds
Lens	Polycarbonate
Heat Sink	Aluminium
Driver Housing	Aluminium

Packaging

Product Bar Code EAN-13 Number	5052544089305
--------------------------------	---------------

## Standards & Approvals

Manufactured In Accordance To

CE Marked

UKCA Marked

WEEE Symbol

Certificate Of Conformity

Accredited Members

TUV Approval

**BS EN 60598-2015,2-1,2-5**

**Yes**




**Yes**

**Yes**

**Yes, available on request**

**LIA, ISO9001:2015, ISO14001:2015**

**Yes**

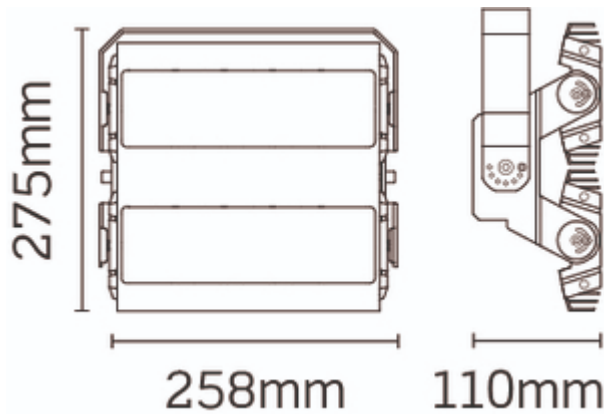

---

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.

Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | [sales@jcc.co.uk](mailto:sales@jcc.co.uk) | [www.jcc.co.uk](http://www.jcc.co.uk)

Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 56 [23/06/2022]