

JC45221/45

Toughflood High Output

Toughflood high output IP66 150W 4000K 21000lm 45° symmetric c/w surge protector

Features & Benefits

- Up to 142 Lumens per circuit Watt
- 5 different beam angle options available
- LED modules can be adjusted individually
- IP66 weather resistance
- Features 10KV Surge protector as standard
- Produced to order
- contact JCC customer services on 01243 838999



CRI:RA



BEAM



RATING



CLASS I



WARRANTY

General Information

Mounting

Trade Name

Environment

Product Group

Color Finish

Product Shape

Product Range

Overall Dimensions

Light Source

Light Source Features

Luminaire Accessories

Recommended Product Location

Method Of Fix

Max Angle Of Tilt & Rotation

IP Rating

Origin of manufacturer

Warranty

Wall

Toughflood

Outdoor

Floodlight

Black

Rectangular

Toughflood

275mm x 373mm x 110mm

LED

Neutral White

No

Exterior

Bolt fixed

180°

IP66

China

2 years standard warranty extends to 5 years when registered within the first year of purchase (See Website for terms and conditions)

| | |
|-------------------------|------------------|
| Driver Manufacturer | Philips |
| LED Manufacturer/Type | Philips Lumileds |
| Lighting Product Type 1 | Wall Light |

Electrical

| | |
|----------------------------------|--------------------|
| Voltage Rating | 220-240 |
| Operating Frequency Hz | 50/60Hz |
| Luminaire Circuit Wattage | 150W |
| Class | Class I |
| Total Harmonic Distortion (THD)% | < or equal to 10 |
| EMC Compliant (EN55015) | Yes |
| Power Factor Correction | > or equal to 0.95 |
| Dimmable | No |

Thermals

| | |
|----------------------------------|------|
| Max Luminaire Ambient Temp. | 50°C |
| Max Driver/Ballast Ambient Temp. | 50°C |
| Thermal Cut Out | 85°C |

Performance Data

| | |
|------------------|-------|
| LED Life (Hours) | 54000 |
|------------------|-------|

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

| | |
|------------------------------|-------------------------------------------------------------------|
| Energy Rating | This product contains a light source of energy efficiency class D |
| Actual Lumen Output | 21100 |
| Lumens Per Circuit Watt | 141 |
| Color Rendering Index | 50-79 |
| CRI: Ra | 70 |
| Correlated Color Temperature | 4000K |
| LOR (Light Output Ratio) % | 100 |
| Photometry Available | Yes |

Construction

| | |
|------------------|------------------|
| Primary Material | Steel |
| LED Brand | Philips Lumileds |
| Lens | Polycarbonate |
| Heat Sink | Aluminium |
| Driver Housing | Aluminium |




Packaging

| | |
|--------------------------------|---------------|
| Product Bar Code EAN-13 Number | 5052544089343 |
|--------------------------------|---------------|

Standards & Approvals

Manufactured In Accordance To
CE Marked
UKCA Marked
WEEE Symbol
Certificate Of Conformity
Accredited Members
TUV Approval

BS EN 60598-2015,2-1,2-5
Yes
Yes
Yes
Yes, available on request
LIA, ISO9001:2015, ISO14001:2015
Yes

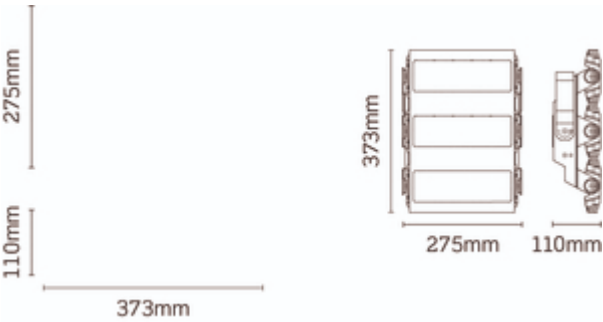

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 56 [23/06/2022]